

SELECT PLANT HIRE

SMALL TOOLS

Our small tools range offers a wide selection of high-quality, reliable equipment to handle every detail of your project. From breakers, saws, and drills to mixers and compacting tools, we provide well-maintained, user-friendly solutions ideal for construction, renovation, and finishing work across all site environments

Heating, Drying and Cooling



**Andrews DE25
DE25 Fan Heater
(52HE001H)**

Weight	11kg
Dimensions L x W x H	320 x 260 x 360 mm
Heating Duty / Heat Output	2.8 kw
Airflow	250 m³/h
Typical Heated Area	67.6 m²
Noise Level @3m	50.6 dBA²
Voltage	110 v (32amp)



**Andrews DE95
DE95 Fan Heater
(52HE004H)**

Weight	32kg
Dimensions L x W x H	470 x 410 x 580 mm
Heating Duty / Heat Output	20 kw
Airflow	1500 m³/h
Typical Heated Area	484 m²
Noise Level @3m	61 dBA²
Voltage	415 v (32amp)



**Rhino TQ3
Red Rad Heater
(52RRH01H)**

Weight	14.3 Kg
Dimensions L x W x H	460 x 500 x 1000 mm
Heating Duty / Heat Output	2.8 kw
Lamp Watts	2 x 1400
Heat Settings	2
Voltage	110 v (32amp)



**Master BLP103DV
Gas Space Heater
(52SH350H)**

Weight	27.5kg
Dimensions L x W x H	895 x 324 x 624 mm
Power	194.500 - 351.700 Btu/h
Air Displacement	3.26 m³/h
Fuel Consumption	6.66 kg/h
Ignition	Electronic
Voltage	110 v (16amp)



**Ebac BD50 DV
Dehumidifier
(52DEHUM)**

Weight	80kg
Dimensions L x W x H	915 x 610 x 692 mm
Effective Arev Volume	300 m³
Airflow	510 m³/h
Typical Extraction (L per day)	30
Defrost Timer	Yes
Voltage	Dual Voltage*

*Dual Voltage (Specify on Request)



**Rhino DF24
Turbo Fan
(52SH03H)**

Weight	16.7kg
Dimensions L x W x H	740 x 280 x 755 mm
Blade Diameter	609.6 mm
Airflow	13140.15 m³/h
Max Speed (RPM)	915
Sound Power Level	77 dBA²
Voltage	110 v (16amp)

Cooling



BLU-12HP
Air Conditioning Unit
(52ACU)

Weight	39kg
Dimensions L x W x H	405 x 395 x 820 mm
Heating Capacity	12000 Btu/h
Cooling Capacity	12000 Btu/h
Airflow (High/Med/Low)	360 / 330 / 300 m³/h
Sound Pressure Level	53 / 51 / 49 dBa²
Voltage	230 v (13amp)



Concrete Tools



Ogura HSC25-BLN
Cordless Rebar Cutters
(52RBCC03)

Weight	4kg
Dimensions L x W x H (mm)	471x137x139
Max Cutting Capacity	25mm
Sound Power Level	86.3 dBa²
Vibration Value	1.5 m/s²
Voltage	18 v



HSC-38BLN
Cordless Rebar Cutters
(52RBCC03)

Weight	6kg
Dimensions L x W x H (mm)	515x170x148
Max Cutting Capacity	38mm
Sound Power Level	88.7 dBa²
Vibration Value	1.5 m/s²
Voltage	18 v



Diamond DBD19L
Rebar Benders
52BB006

Weight	40.8kg
Dimensions L x W x H (mm)	320x424x415
Max Cutting Capacity	20mm
Bending Angle	0-180°
Bending Speed to 180°	5s
Power Source	110v 16amp



Ogura MB-225
Cordless Rebar Cutters
(52BB009H)

Weight	94.9kg
Dimensions L x W x H (mm)	540x466x441
Max Cutting Capacity	28.1mm
Bending Angle	0-180°
Bending Speed to 180°	9s
Power Source	110v 16amp



Ogura HBB-525
Rebar Straighteners
(52BB009H)

Weight	14kg
Dimensions L x W x H (mm)	486x194x226
Max Cutting Capacity	25mm
Bending Angle	0 - 90°
Bending Speed to 180°	8s
Power Source	110v 16amp



Ogura HBB-32HPW
Rebar Straighteners
(52BB007H)

Weight	25.4kg
Dimensions L x W x H (mm)	670x302x219
Max Cutting Capacity	32mm
Bending Angle	0 - 90°
Bending Speed to 180°	15s
Power Source	110v 16amp



Minimix 150
4/3 Concrete Mixer Petrol/110v
(52MI001H) / (52MI007H)

Weight	78.6 / 55.5kg
Drum Capacity	130 ltr
Max Mix Capacity	90 ltr
Fuel Type	Petrol / 110v
Fuel Tank Capacity	0.55ltr (Petrol)
Power Output	0.55kw (110v)



Minimix 150 E
4/3 Concrete Cordless
(52MI008H)

Weight	59kg
Drum Capacity	130 ltr
Max Mix Capacity	90 ltr
Power Output	82v



Baron F200
FORCED ACTION MIXER
(52MI004H)

Weight	180kg
Drum Capacity	200 ltr
Max Mix Capacity	160 ltr
Dimensions D x W x H (mm)	1050x780x1160
Voltage	110 v (16amp)



Speedcrete 12 Cube
Cube Mould Tank
(52CMTH)

Weight	9kg
Dimensions	970x610x610
Capacity	12x150mm / 40 x 100mm
Voltage	110 v (16amp)



Wacker IRFU 38 / 45 / 57
High Frequency Internal Poker
(52HFP2H/52HFP3H/52HFP4H)

Weight	13.6/16/19.8kg
Vibration Value	2.5/4/4 m/s²
Effective Radius	500/600/850 mm
Frequency	50 Hz
Voltage	110 v (16amp)
Power Output	0.55kw (110v)



Hilti NVC 10-22
Cordless High-Frequency Poker
(52HFP5H)

Weight	Backpack 8.28/ Poker 5.5kg
Vibration Value	2.6 m/s²
Sound Power Level	86 dBa²
Frequency	200 Hz
Voltage	22 v



Wacker ARFU 26
External Shutter Vibrator
(52AEV01H)

Weight	17.98 kg
Centrifugal Force	3.47 kN
Sound Pressure Level	70 dBa²
Frequency	50 - 60Hz
Voltage	110 v (16amp)



Clipper CT601
Powerfloats 24"
(52PF004H)

Weight	62kg
Dimensions LxWxH (mm)	1560x650x1060
Max Blade Diameter	600mm
Sound Power Level	93 dBa²
Vibration Value	< 2.5 m/s²
Blade Type	Finishing (P.O.A)
Float Pan Supplied	Yes



Clipper CT901
Powerfloats 36"
(52PF004H)

Weight	75kg
Dimensions LxWxH (mm)	1980x950x1060
Max Blade Diameter	900mm
Sound Power Level	94 dBa²
Vibration Value	< 2.5 m/s²
Blade Type	Finishing (P.O.A)
Float Pan Supplied	Yes

Concrete Tools



**Clipper CT1201
Powerfloats 48"**
(52PF004H)

Weight	75kg
Dimensions LxWxH (mm)	1190x2120x1025
Max Blade Diameter	1110mm
Sound Power Level	94 dBA ²
Vibration Value	< 2.5 m/s ²
Blade Type	Finishing (P.O.A)
Float Pan Supplied	Yes



**MULTIQUIP DSGPULW
Vibroscreed**
(52VI001H)

BLADE WIDTHS (ft)	6/8/10/12/14/16
Weight - Power Unit	0.6kg
Weight - Beam (+Above)	0.6 kg per Ft
Sound Power Level	50 dBA ²
Vibration Value	1.5 m/s ²
Power Output (Kw)	0.55 (110V)



**Milwaukee MXF PSC
Cordless Vibroscreed**
(52VI002H)

BLADE WIDTHS (ft)	6/8/10/12/14/16
Weight - Power Unit	16.8 Kg
Weight - Beam (+Above)	0.6 kg per Ft
Sound Power Level	96.9 dBA ²
Vibration Value	5.7 m/s ²
Power Output (Kw)	0.55 (110V)



**Big Blue
Easy Float**
(52EF001H)

Float Dimensions (mm)	1200 x 300
Tilt Action Knucklehead	Yes
Pole Length	1800 mm
Poles Supplied As Standard	3

Compaction



**WACKER VP1030A
Petrol Plate Compactor**
(52LG140H)

Weight	50kg
Dimensions L x W x H (mm)	855x300x900
Compacted Area - Soil	396 m ² /h
Forward Speed - Soil	23 m/min
Fuel Tank Capacity	1.4 lts



**WACKER DPU2540H
FWD/REV Plate Medium**
(52LG301H)

Weight	160kg
Dimensions L x W x H (mm)	736x400x736
Compacted Area - Soil	504 m ² /h
Forward Speed - Soil	21 m/min
Fuel Tank Capacity	3 lts





TRELAUNY TFP200
Floor Planer - Petrol or Electric
(52FP002H)

Weight	72 / 64kg
Dimensions LxWxH	900x360x900
Working Width (mm)	195
Max Cutting Depth (mm)	3
Sound Power Level	95 dBa ²
Vibration Value	10 m/s ²
Dust Extraction Available	Yes



TRELAUNY DCG500-110v
Floor Grinde110v
(52FG002H)

Weight	114kg
Dimensions LxWxH	750/660/914
Sound Power Level	86 dBa ²
Disc Plate Size	2 x 250mm
Vibration Value	2.36 m/s ²
Transformer Size	5 Kva
Dust Extraction Available	Yes



Hilti DGH 130
Diamond Grinder Hand Held 110v
(52DG001H)

Weight	2.54kg
Sound Pressure Level	88 dBa ²
Disc Plate Size	130
Vibration Value	3.6 m/s ²
Dust Extraction Available	Yes
Power Source	110v 16amp



Hilti DGH 130-22
Diamond Grinder Hand-Held Cordless
(52DG001H)

Weight	2 kg
Sound Pressure Level	85 dBa ²
Disc Plate Size	130
Vibration Value	10 m/s ²
Dust Extraction Available	Yes
Power Source	22v



Yokota SB9
Dry Wall Sander
(52SA006H)

Weight	2.8 kg
Length	1450 mm
Sanding Disc Diameter	225 mm
Power	450W
Power Source	110v
Extension Handle Length	550mm
Dust Extraction Available	Yes





Milwaukee M18 FSAGSVO125X-0X
5"/125MM Cordless Angle Grinder
(52AG004H)

Weight	3kg
Cutting Disc Diameter	125mm
Max Cutting Capacity	33mm
Vibration Value	3.27 m/s ²
Sound Power Level	94.4 dBa ²
Voltage	18 v
Switch Type	Dead Man



Milwaukee M18 FLAG230
PDB-0C9"/230MM Cordless Angle Grinder
(52AG006H)

Weight	5.3kg
Cutting Disc Diameter	230 mm
Max Cutting Capacity	65 mm
Vibration Value	10.2 m/s ²
Sound Power Level	90.6 dBa ²
Voltage	18 v
Switch Type	Paddle



HILTI SB 4-22
Cordless Band Saw
(52BS001)

Weight	3.2 Kg
Max Cutting Capacity	63.5 mm
Vibration Value	1.4 m/s ²
Sound Power Level	88 dBa ²
Voltage	22 v



STIHL TS410
Masonry Cut Off Saw 2 Stroke
(52SW004H)

Weight	9.4kg
Cutting Disc Diameter	300mm
Max Cutting Capacity	100mm
Vibration Value	3.9 m/s ²
Sound Power Level	109 dBa ²
Dust Suppression	Additional Water Tank



Husqvarna K1 Pace
Masonry Cut Off Saw Cordless
(52SW005H)

Weight	7.2kg
Cutting Disc Diameter	300mm
Max Cutting Capacity	121mm
Vibration Value	2 m/s ²
Sound Power Level	102 dBa ²
Voltage	93.6 v
Dust Suppression	Additional Water Tank



Clipper CS 451
Floorsaw
(52FS18)

Weight	112kg
Cutting Disc Diameter	450mm
Max Cutting Capacity	170mm
Vibration Value	2.8 m/s ²
Sound Power Level	105 dBa ²
Dimensions LxWxH (mm)	1180x538x1040
Dust Suppression	On Board Water Tank



MAKITA LC1230N
Cold Cut Chopsaw
(52PTH30)

Weight	19kg
Cutting Disc Diameter	305mm
Max Cutting Capacity	115mm
Vibration Value	3 m/s ²
Sound Power Level	108 dBa ²
Voltage	110 v



Makita DTM52Z
Cordless Multi Tool
(52MT001H)

Weight	2kg
Dimensions LxWxH	332x95x125
Orbits Per Minute	10000-20000 min. ⁻¹
Vibration Value	<2.5 m/s ²
Sound Power Level	69 - 76 dBa ²
Voltage	18 v



Milwaukee M18CRAD2-0
Cordless Right Angle Drill
(52DR002H)

Weight	4.1kg
Chuck Capacity	13mm
Max Drilling Steel	12.7 mm
Max Drilling Wood	Auger 26 mm / Hole Saw 102 mm
Vibration Value	<2.5 m/s ²
Sound Power Level	92.6 dBa ²
Voltage	18v



Hilti SF 6H-22
Cordless Hammer Drill Driver
(52DR051H)

Weight	1.677kg
Chuck Capacity	13mm
Max Drilling Steel	13 mm
Max Drilling Wood	(Hard) 20 mm / (Soft) 32 mm
Vibration Value	1.2 m/s ²
Sound Power Level	98 dBa ²
Voltage	22 v



Hilti TE 4-22
Cordless Rotary Hammer Drill
(52DR006H)

Weight	2.45 kg
Chuck Type	SDS Plus
Hammer Drilling Range	4-28 mm
Vibration Value	12.3 m/s ²
Sound Power Level	98 dBa ²
Voltage	22 v
Dust Removal	TE DRS-4/6



Hilti TE 6-22
Cordless Rotary Hammer Drill
(52DR026H)

Weight	2.84 kg
Chuck Type	SDS Plus
Hammer Drilling Range	4-28 mm
Vibration Value	10.7 m/s ²
Sound Power Level	102 dBa ²
Voltage	22 v
Dust Removal	TE DRS-4/6



Hilti TE 30-22
Cordless Combi Hammer Drill
(52DR052H)

Weight	3.9 kg
Chuck Type	SDS Plus
Hammer Drilling Range	5 - 28 mm
Vibration Value	8.5 m/s ²
Sound Power Level	91 dBa ²
Voltage	22 v
Dust Removal	TE DRS-Y / TE DRS-D



Hilti TE 60-22
Cordless Combi Hammer Drill
(52DR054H)

Weight	6.3 kg
Chuck Type	SDS Max
Hammer Drilling Range	12 - 100 mm
Vibration Value	8.5 m/s ²
Sound Power Level	106 dBa ²
Voltage	22 v
Dust Removal	TE DRS-Y / TE DRS-D



Hilti TE 70-ATC/AVR
Combi Hammer Drill (52DR048H)

Weight	10 kg
Chuck Type	SDS Max
Hammer Drilling Range	12 - 150 mm
Vibration Value	8.6 m/s ²
Sound Power Level	113 dBa ²
Voltage	22 v
Dust Removal	TE DRS-Y / TE DRS-D



Makita UT1400
Paddle Mixer Drill (52DR046H)

Weight	5.5 kg
Spindle Thread	M14
Max Blade Diameter	140 mm
Vibration Value	3.8 m/s ²
Sound Power Level	86 dBa ²
Voltage	110 v



Breaking



**Hilti TE 700-AVR
Heavy Duty Breaker 110v
(52HA008H)**

Weight	7.9 kg
Chuck Type	TE-S
Working Direction	Wall
Vibration Value	6.9 m/s ²
Sound Power Level	86 dBa ²
Voltage	110 v 16amp
Dust Removal	TE DRS-B



**Hilti TE 1000-AVR
Heavy Duty Breaker 110v
(52HA012H)**

Weight	12.5 kg
Chuck Type	TE-S
Working Direction	Floor / Wall
Vibration Value	5.9 m/s ²
Sound Power Level	88 dBa ²
Voltage	110 v 16amp
Dust Removal	TE DRS-B



**Hilti TE 2000-AVR
Heavy Duty Breaker 110v
(52HA013H)**

Weight	14.5 kg
Chuck Type	TE-S
Working Direction	Floor
Vibration Value	3.9 m/s ²
Sound Power Level	88 dBa ²
Voltage	110 v 16amp
Dust Removal	TE DRS-B




**JCB Beaver Pack
Hydraulic Power Pack
(52BR005H)**

Weight	66 Kg
Hydraulic Flow	0 - 20 Ltr/Min
Max Pressure	138 Bar
Vibration Value	4 m/s ²
Sound Power Level	108 dBa ²
Fuel Type	Petrol
Dust Removal	N/A



**HM25 Breaker
Hydraulic Power Breaker
(52BR006H)**

Weight	26 Kg
Hydraulic Flow	0 - 20 Ltr/Min
Max Pressure	138 Bar
Vibration Value	4 m/s ²
Sound Power Level	108 dBa ²
Fuel Type	Petrol
Dust Removal	N/A

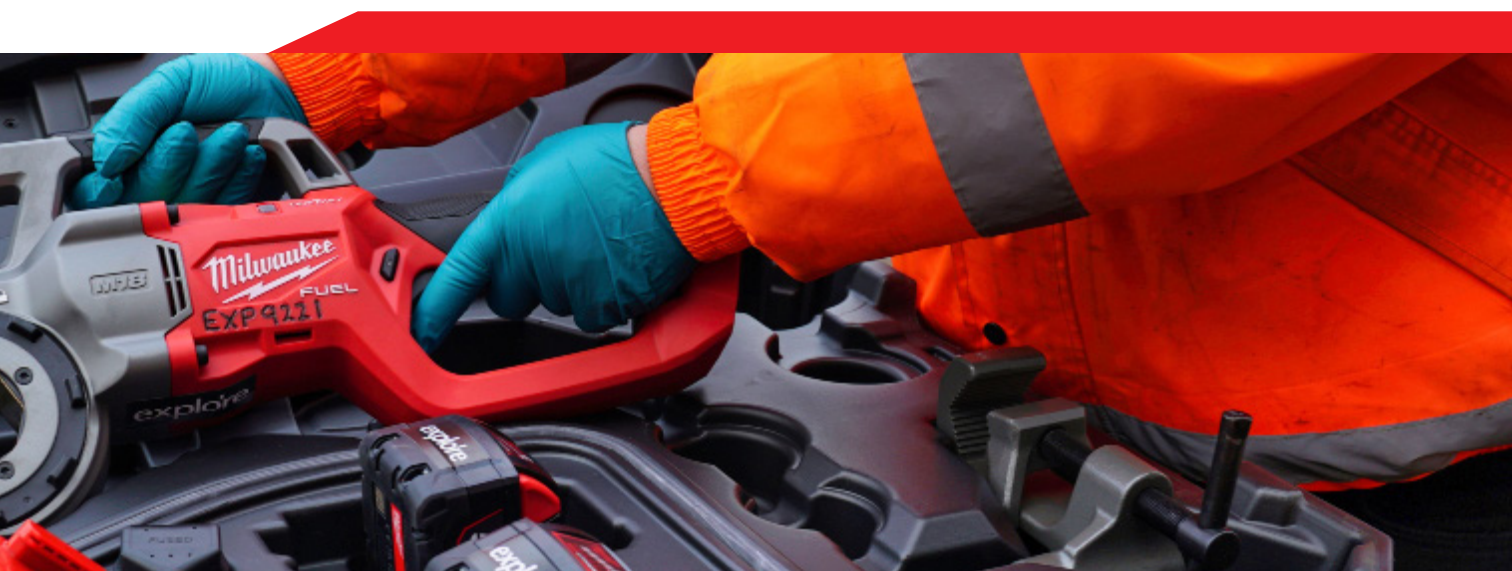



HILTI SID 4-22 / SID 6-22
Cordless Impact Driver
(52SC003H)

Weight	0.85 / 1.0 kg
Chuck Capacity	1/4" Hexagonal (Click In)
Max Torque	186 N/m
Impact Speed	4400 / 4250 BPM
Sound Power Level	103 / 102 dBa²
Vibration Value	10.7 / 13.4 m/s²
Power Source	22v



HILTI SIW 6AT-22
Cordless Impact Wrench
(52WR007H)

Weight	1.8 kg
Anvil Size	1/2 "
Max Torque	(1) 300 N/m / (2) 450 N/m
Impact Speed	(1) 3,100/min / (2) 3500/min
Sound Power Level	108 dBa²
Vibration Value	11.9 m/s²
Power Source	22v



PASLODE IM350+
Paslode Framing Nail Gun
(52DR025H)

Weight	3.4 kg
Product Dimensions	370 x 305 x 110 mm
Nail Range	51 - 90 mm
Magazine Capacity	55 Nails
Sound Pressure Level	89 dBa²
Vibration Value	2.6 m/s²



PASLODE IM65A F16
Paslode Finishing Nail Gun
(52DR025H)

Weight	2 kg
Product Dimensions	303 x 288 x 90 mm
Nail Range	32 - 63 mm
Magazine Capacity	100 Nails
Sound Pressure Level	92 dBa²
Vibration Value	2.8 m/s²



HILTI DX 6 F8
Cartridge Nail Gun
(52DR053H)

Weight	3.37kg
Product Dimensions	475 x 69 x 190 mm
Fastner Length Range	13 - 72 mm
Sound Power Level	106 dBa²
Vibration Value	< 2.5 m/s²



MAX RB 611
Rebar Tying Tool
(52BB008)

Weight	2.5 kg
Product Dimensions	300 x 120 x 352
Ties Per Coil Min / Max	115 / 205
Tie Speed	2 sec
Sound Power Level	87 dBa²
Vibration Value	0.5 m/s²
Power Source	18v



Hilti CD 4-22
Cordless Caulking Gun
(52CG001H)

Weight	2.6 kg
Product Dimensions	186x145x247 mm
Sound Power Level	83 dBa²
Vibration Value	0.2 m/s²
Power Source	22v



Dust Extraction



Hilti VC 5-22
Cordless Vacuum Cleaner
(52VA002)

Weight	4.6 kg
Product Dimensions	402x227x284 mm
Container Capacity	5l
Dust Class	M or Hepa
Sound Power Level	79 dBa ²
Vibration Value	<2.5 m/s ²
Power Source	22v



Hilti VC 10-22
Cordless Vacuum Cleaner
(52VA011H)

Weight	8.9 kg
Product Dimensions	215x350x400 mm
Container Capacity	10l
Dust Class	M
Sound Power Level	92.7 dBa ²
Vibration Value	<2.5 m/s ²
Power Source	22v



Hilti VC 20M-X
Dust Extraction Unit
(52VA009)

Weight	11 kg
Product Dimensions	530x290x415 mm
Container Capacity	15l
Dust Class	M
Sound Power Level	69 dBa ²
Vibration Value	<2.5 m/s ²
Power Source	110v 16amp



Hilti VC 40M-X
Dust Extraction Unit
(52SW028)

Weight	14.4 kg
Product Dimensions	560x365x590 mm
Container Capacity	30l
Dust Class	M
Sound Power Level	69 dBa ²
Vibration Value	<2.5 m/s ²
Power Source	110v 16amp



Yokota A22
Heavy Duty Vacuum
(52VA007H)

Weight	35 kg
Product Dimensions	530x560x1070 mm
Container Capacity	20l
Dust Class	M
Sound Power Level	76 dBa ²
Vibration Value	<2.5 m/s ²
Power Source	110v 16amp



Trelawny A45
Triple Motor Vacuum
(52VA007H)

Weight	65 kg
Product Dimensions	580x600x150 mm
Container Capacity	60l
Dust Class	M
Sound Power Level	76 dBa ²
Vibration Value	<2.5 m/s ²
Power Source	110v 32amp





Hilti WFE 450-E
Random Orbital Sander 110v
(52SA002H)

Weight	2.2 kg
Sanding Plate Diameter	150 mm
Speed of Oscillation Range	10000 - 20000 rpm
Dust Removal	Hoover
Sound Power Level	93 dBA ²
Vibration Value	3.9 m/s ²
Power Source	110 v



Makita DBO180RTJ
Cordless Palm Sander
(52SA005H)

Weight	1.7 kg
Sanding Plate Diameter	125 mm
Rotations per Minute L/M/H	7000/9500/11000
Dust Removal	Hoover
Sound Power Level	77 dBA ²
Vibration Value	1.5 m/s ²
Power Source	18 v



Makita DKP180RTJ
Cordless Wood Planer
(52SA003H)

Weight	3.5 kg
Planing Width	82 mm
Max Planing Depth	2 mm
Dust Removal	Hoover
Sound Power Level	95 dBA ²
Vibration Value	4.5 m/s ²
Power Source	18 v



Hilti SJD 6-22
Cordless Jigsaw
(52SW008H)

Weight	2.2 kg
Max Cutting (Wood/Alloy/Steel)	150 / 25 / 10 mm
Max Bevel Angle	45°
Dust Removal	SJD/T 6-22/SJD 6 DRS
Sound Power Level	98 dBA ²
Vibration Value	3.8 m/s ²
Power Source	22 v



Hilti SC 30WR-22
Cordless Circular Saw
(52SW040H)

Weight	3.7 kg
Blade Diameter	190 mm
Max Cutting Depth	70 mm
Max Bevel Angle	50°
Sound Power Level	102 dBA ²
Vibration Value	2.9 m/s ²
Power Source	22 v



Hilti SR 6-22
Cordless Reciprocating Saw
(52SW050H)

Weight	3.1 kg
Stroke Rate	2600 /min
Stroke Length	32 mm
Dust Removal	SR DRS
Sound Power Level	94 dBA ²
Vibration Value	13.4 m/s ²
Power Source	22 v




Makita 5903RK
Circular Saw 110v (52SW001H)

Weight	7.6 kg
Blade Diameter	235 mm
Max Cutting Depth	85 mm
Max Bevel Angle	45°
Sound Power Level	106 dBA ²
Vibration Value	3.0 m/s ²
Power Source	110v 16amp



Makita LS1219
Slide Compound Mitre Saw (52SW010H)

Weight	29.3 Kg
Blade Diameter	305 mm
Capacity 90°	107x363/92x382 mm
Capacity 45°	107x255/92x268 mm
Sound Power Level	100 dBA ²
Vibration Value	<2.5 m/s ²
Power Source	110v 16amp

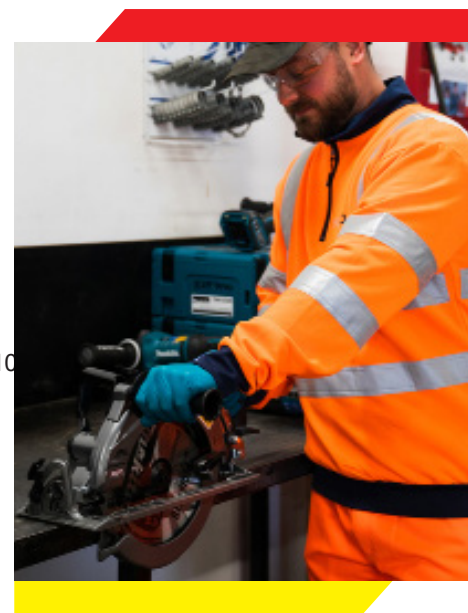



**Armorgard PWS Powerstation
Battery Bank Locker Unit
(52BB001H)**

Weight	76 kg
Product Dimensions LxWxH	600x453x1803 mm
Lockers	10
Locker Dimensions D/W/H	287x396x260 mm
Power Cut Off	No
Power Source	230v



**Armorgard VH16-110 Volthub
Charging Cabinet
(52BB002H)**

Weight	334 kg
Product Dimensions LxWxH	750x1770x1820 mm
Lockers	12 Small/4 Large
Locker Dimensions D/W/H	(S)260x355x260/ (L)475x355x260mm
Power Cut Off	Yes
Audible Alarm / Fire Suppression	Yes
Power Source	110v



**Armorgard FB Flambank
Firesafes
(52FSH)**

Weight	150 kg
Product Dimensions LxWxH	670x1285x1275mm
Internal Shelf Available	Yes
Spill Drain	Yes
Raised Floor & Ventilation	Yes
Castors Fitted	On Request
Keys Supplied	2



**CB Chembank
COSHH Storage
(52COSHH)**

Weight	86 kg
Product Dimensions LxWxH	550x1135x575 mm
Internal Shelf Available	No
Spill Drain	Yes
Raised Floor & Ventilation	Yes
Castors Fitted	On Request
Keys Supplied	2



**Armorgard MBH12-VF
Mobile Tuffbench
(52TV006H)**

Weight	125 kg
Product Dimensions LxWxH	805x1290x1080 mm
Vices Fitted	6" Chain Vice / 6" Engineers Vice
Castors Fitted	Yes
Keys Supplied	2



**Armorgard SS2
Mobile Stie Station
(52MSS001)**

Weight	223 kg
Product Dimensions LxWxH	845x1400x1970 mm
Castors Fitted	Yes



**ARMORGARD SS7
Chopsaw Booth / Cutting Station
(52PTH83)**

Weight	175 kg
Product Dimensions LxWxH	1360X770X1905 mm
Castors Fitted	Yes
Keys Supplied	2



**Boot Wash Pro
3 Bay Boot Wash Station
(52BW001H)**

Weight	20 kg
Product Dimensions LxWxH	1276X492X1000 mm
Linkable	Yes



**Numatic WVD900
WET VACUUM 30LTR
(52VA001H)**

Weight	25 kg
Product Dimensions L/W/H	800x490x880 mm
Airflow	98 ltr/sec
Cleaning Range	26.8 m
Wet Capacity	32 ltr



**Numatic WVD1800
WET VACUUM 70LTR
(52VA006H)**

Weight	28.3 kg
Product Dimensions L/W/H	684x585x935 mm
Airflow	49 ltr/sec
Cleaning Range	26.8 m
Wet Capacity	70 ltr



**Karcher KM 70/20 C
Push Along Sweeper
(52VA008H)**

Weight	21 kg
Product Dimensions L/W/H	1300x765x1035 mm
Working Width	480 mm
Max Area Performance	2800m²/h
Tank Volume	20 l



**Karcher HD 4/9 P 110V
Pressure Washer 110v
(52PW002H)**

Weight	20.5 kg
Product Dimensions L/W/H	351x312x904 mm
Working Pressure	120 Bar / 1740 PSI
Water Supply	Direct Feed
Water Consumption	6.5 ltr/min
Hose Reel Length	10m as Standard
Sound Pressure Level	70 dBa²



**Brendon 30KLN+ES
Pressure Washer Diesel
(52PW001H)**

Weight	143.5 kg
Product Dimensions L/W/H	1050x680x800 mm
Working Pressure	207 Bar / 3000 PSI
Water Supply	Direct / Suction Feed
Water Consumption	15 ltr/min
Hose Reel Length	15m as Standard
Sound Power Level	108 dBa²



**Brendon MBW20KDSB
Mini Bowser Washer
(52PW005H)**

Weight	Dry 139kg / Wet 259kg
Product Dimensions L/W/H	1650x780x1040 mm
Working Pressure	124 Bar / 1800 PSI
Water Capacity	125 ltr
Water Consumption	10 ltr/min
Hose Reel Length	15m as Standard
Sound Power Level	106 dBa²





Novopress ACO 103
ACO103 Mini Pipe Press Tool
(52ENG01H)

Weight	1.6 kg
Product Dimensions LxWxH	320 x 98 x 72 mm
Jaws as Standard	15,18,22,28,35 mm
Max Dimension - Metal Pipe	Up to 35mm (M Contour)
Sound Pressure Level	71 dBa ²
Vibration Value	<2.5 m/s ²
Power Source	12v



Novopress ACO 203
ACO203 Pipe Press Tool
(52ENG02H)

Weight	2.3kg
Product Dimensions LxWxH	387x75x111 mm
Jaws as Standard	15,18,22,28,35 mm
Max Dimension - Metal Pipe	Up To 54mm (M Contour)
Sound Pressure Level	81 dBa ²
Vibration Value	<2.5 m/s ²
Power Source	18v



Novopress ACO 203XL
ACO203 XL Pipe Press Tool
(52ENG03H)

Weight	3.8 kg
Product Dimensions LxWxH	490 x 80 x 111 mm
Jaws as Standard	15,18,22,28,35 mm
Max Dimension - Metal Pipe	Up To 108mm (M Contour)
Sound Pressure Level	78 dBa ²
Vibration Value	<2.5 m/s ²
Power Source	18v



Armorgard Tuffbench
Engineers Workbench
(52PTH47)

Weight	58 kg
Product Dimensions LxWxH	1140 x 855 x 970 mm
Load Capacity	300 kg
Vices Fitted	6" Chain Vice 6" Engineers Vice
Castors Fitted	Yes



Armorgard PS3 Pipestor
Pipe Store
(52TV008H)

Weight	133 kg
Product Dimensions LxWxH	3220 x 575 x 815 mm
Internal Shelf	4 Compartments
Available on Castors	Yes



Armorgard PR1 PipeRack
Pipe Rack
(52TV007H)

Weight	83 kg
Product Dimensions LxWxH	1010x15660x1570mm
Linkable	Yes
Available on Castors	Yes



Armorgard VK2 V-Kart
Pipe Trolley
(52ENG22H)

Weight	35 kg
Product Dimensions WxDxH	1230 x 835 x 900 mm



**Stephill SSDK16M
15KVA Generator
(52VG015H)**

Weight	693 kg
Product Dimensions L/W/H	1800x800x1270mm
Voltage	110 / 230 / 400 v
Power Outlets 110v	1x16amp, 3x32amp
Power Outlets Other	(230v) 1x16, 2x32amp / (400v) 1x32amp
Sound Power Level	68dBa ² @4m / 63dBa ² @7m
Fuel Tank Capacity	120ltr Diesel / HVO



**Trime TG1000 SSKV
10KVA Generator
(52VG009H)**

Weight	350 kg
Product Dimensions L/W/H	1220x670x840mm
Voltage	110 / 230 v
Power Outlets 110v	2x16amp, 1x32amp
Power Outlets Other	2 x 16amp, 1 x 32amp
Sound Power Level	89 dBa ²
Fuel Tank Capacity	40ltr Diesel / HVO



**Trime MGTP6000 SSY
6 KVA Generator
(52VG006H)**

Weight	207 kg
Product Dimensions L/W/H	1570x760x980 mm
Voltage	110 / 230 v
Power Outlets 110v	2x16amp, 1x32amp
Power Outlets Other	1 x 16amp, 1 x 32amp
Sound Power Level	90 dBa ²
Fuel Tank Capacity	25ltr Diesel / HVO



**3kVA
3KVA Generator
(52VG003H)**

Weight	43 kg
Product Dimensions L/W/H	610x420x415 mm
Voltage	110 v
Power Outlets 110v	1x16amp, 1x32amp
Power Outlets Other	N/A
Sound Power Level	96 dBa ²
Fuel Tank Capacity	3.1 Petrol



**Instagrid Go
2.1KW Battery Pack
(52VG016H)**

Weight	21 kg
Product Dimensions L/W/H	158x210x420 mm
Voltage	110 v
Rated Power Output (kW)	3.6 kw
Power Outlets 110v	2 x 16amp





**Milwaukee MXF TL-601
Cordless Tower Light
(52TH009H)**

Weight	53 kg
Max Height	3.1 m
Max Light Output (Lumens) - Mains	High-27000 / Med-14000 / Low-7000
Max Light Output (Lumens) - Battery	High-27000 / Med-14000 / Low-7000
Run Time - Battery	High- 3h / Med- 6h / Low- 10h
Max Wind Force	55 km/h
Power Source	Mains / 18 v



**Nightsearcher Galaxy Pro 6
LED Tripod Light Rechargeable
(52TH011H)**

Weight	1.5 kg
Max Light Output	6000 Lumens
Max Run Time	60 hrs
Tripod Mountable	Yes
Rechargeable	Yes



**Elite LED35WRLDH
Twin Head Tripod Light 110v
(52TH11H)**

Weight	9 kg
Max Height	2.2 m
Max Light Output	2 x 5500 Lumens
Power Source	110v 16amp



**LedLenser AF12R
Cordless Floodlight**

Weight	1.87 kg
Max Light Output	8000 Lumens
Max Run Time	12.5 hrs
Tripod Mountable	Yes
Rechargeable	Yes



**Elite T3KVA2X16
3KVA Transformer
(52TR001H)**

Weight	17 kg
Rating	3.3 KVA
Input Voltage>Output Voltage	230v > 110v *Step Down
Output Sockets	2 x 16 Amp



**Elite T5KVA2X161X32V2
5KVA Transformer
(52TR002H)**

Weight	31 kg
Rating	5 KVA
Input Voltage > Output Voltage	230v > 110v *Step Down
Output Sockets	2 x 16 Amp / 1 x 32 Amp



**Blackley S210254
Step Up Transformer
(52TR003H)**

Weight	26 kg
Rating	3 KVA
Input Voltage > Output Voltage	110v > 230v *Step Up
Output Sockets	1 x 16 Amp / 2 x 13 Amp
RCD Protection	30 mA

Pumps



Tsurumi LSC1.4S
1" Puddle Pump
(52PU002H)

Weight (Dry)	12 kg
Product Dimensions	196 x 316 mm
Max Head Height	11 m
Flow Rate	170 l/min
Outlet Diameter	1"
Power Source	110v 16 Amp



Tsurumi LB-480
2" Submersible Pump
(52PU001H)

Weight (Dry)	10.4 kg
Product Dimensions	187 x 275 mm
Max Head Height	11 m
Flow Rate	225 l/min
Outlet Diameter	2"
Power Source	110v 16 Amp



Tsurumi LB-800
2" Submersible Pump
(52PU001H)

Weight (Dry)	15.4 kg
Product Dimensions	187 x 341 mm
Max Head Height	15 m
Flow Rate	310 l/min
Outlet Diameter	2"
Power Source	110v 16 Amp



Tsurumi LB-480 Auto
2" Submersible Pump c/w Float
(52PU012H)

Weight (Dry)	10.4 kg
Product Dimensions	187 x 275 mm
Max Head Height	11 m
Flow Rate	225 l/min
Outlet Diameter	2"
Power Source	110v 16 Amp



Tsurumi HS3.75S
3" Submersible Pump
(52PU019H)

Weight (Dry)	20 kg
Product Dimensions L_{WH}	185x290x385 mm
Max Head Height	18 m
Flow Rate	310 l/min
Outlet Diameter	3"
Power Source	110v 16 Amp





**Pop Up Delta Deck
Delta Deck
(52DD001S)**

Platform Heights	0.45 / 0.87 m
Working Heights	2.45 / 2.87 m
Open Dimensions LxHxW	1.54 x 1.9 x 0.71
Closed Dimensions LxHxW	1.12 x 0.31 x 0.76
Platform Dimensions	0.6 x 0.76 m
Weight	26.8 kg
Max Working Load	200 kg



**Clow BSPD125
Podium Tower 1.25M
(52PT001)**

Platform Heights	1 / 1.25 m
Working Heights	3 / 3.25 m
Open Dimensions LxHxW	2.26 x 1.37 x 0.65
Closed Dimensions LxHxW	2.26 x 1.37 x 0.26
Platform Dimensions	0.6 x 0.53 m
Weight	35 kg
Max Working Load	150 kg



**CLOW BSPD150
Podium Tower 1.5M
(52PT005)**

Platform Heights	1.25 / 1.5 m
Working Heights	3.25 / 3.5
Open Dimensions LxHxW	2.51 x 1.37 x 0.65
Closed Dimensions LxHxW	2.51 x 1.37 x 0.26
Platform Dimensions	0.6 x 0.53 m
Weight	40 kg
Max Working Load	150 kg



**CLOW BSPD175
Podium Tower 1.75M
(52PT006)**

Platform Heights	1.5 / 1.75 m
Working Heights	3.5 / 3.75
Open Dimensions LxHxW	2.76 x 1.37 x 0.65
Closed Dimensions LxHxW	2.76 x 1.37 x 0.26
Platform Dimensions	0.6 x 0.53 m
Weight	45 kg
Max Working Load	150 kg



**1200 Lorrypod
Lorry Access Podium
(52LAL002)**

Platform Heights	1.2 m
Working Heights	1.5m
Open Dimensions LxHxW	1200x2500x2400 mm
Closed Dimensions LxHxW	1500x2500x650 mm
Platform Dimensions	600 x 850 mm
Weight	55 kg
Max Working Load	150 kg



**Pop Up MT4M
Mi Tower
(52MITWR)**

Platform Heights	2 / 3 / 4 m
Working Heights	6 m
Open Dimensions LxHxW	1.346x0.767x5 m
Closed Dimensions LxHxW	
Platform Dimensions	1.020 x 0.610 m
Weight	109.35 kg
Max Working Load	150 kg (1 person + tools)



**Boss Clima 3T
Boss Clima Alloy Tower**

Available Platform Heights	2.2 - 12.2m @1/2 m increments
Max Working Height	2m Above Platform
Available Tower Widths	Narrow 950mm / Wide 1450mm
Available Tower Lengths	1800mm / 2500mm
Optional Advanced Guard Rail	Yes
Weight	See Components List



JLG Pecolift
Pecolift Access Platform
(52PV001H)

Weight (Dry)	196 kg
Product Dimensions	0.99x0.70x1.55 m
Working Footprint LxW	0.99 x 0.70 m
Max Platform Height	1.5 m
Max Working Height	3.5 m
Safe Working Load	150 kg (1 person+tools)
Max Wind Force	Internal Use Only 0 m/s
Track Unit Type	Kin



JLG Ecolift
Ecolift Access Platform
(52PV002H)

Weight (Dry)	319 kg
Product Dimensions	1.28x0.74x1.95 m
Working Footprint LxW	1.28 x 0.74 m
Max Platform Height	2.2 m
Max Working Height	4.2 m
Safe Working Load	150 kg (1 person+tools)
Max Wind Force	Internal Use Only 0 m/s
Track Unit Type	Kin



JLG Ecolift WR
Ecolift Wind Rated Access Platform
(52PV003H)

Weight (Dry)	382 kg
Product Dimensions	1.28x0.95x1.95 m
Working Footprint LxW	1.28 x 0.95 m
Max Platform Height	2.2 m
Max Working Height	4.2 m
Safe Working Load	150 kg (1 person+tools)
Max Wind Force	Internal/External Use 12.5 m/s
Track Unit Type	Kin



Pop Up Pro IQ 10
Pop Up IQ 10 Access Platform
(52PV004H)

Weight (Dry)	394 kg
Product Dimensions	1.31x0.76x1.75 m
Working Footprint LxW	1.31 x 0.76 m
Max Platform Height	2.97 m
Max Working Height	4.97 m
Safe Working Load	240 kg
Max Wind Force	Internal Use Only 0 m/s
Track Unit Type	Tracker & Keypad

Important Information



Associated Risks

Power tools should only be used for their designed purpose.

Use tools on correct power supply as instructed on maker's label. Only 110 volt or cordless tools are permitted on construction sites.

HAWS - Exposure to vibration when using hand held / operated tools and machinery can lead to permanent injury of the hands and arms, use of vibrating tools to be monitored and controlled by risk assessment.

Always ensure that the guards are in place, and return where required should they be required by the manufacturers specification.

Rotating wheels - Ensure the speed rating of any cutting disc is not exceeded by the tool it is fitted to, and that it has been checked for purpose, persons fitting abrasive wheels should have appropriate training.

Ensure recommended personal protective equipment is worn and used at all times.

Limitations

Do not use if equipment is, or appears to be damaged - Report faults to Select Hire desk or by the Infopoint QR code.

Do not use any electrical equipment that has exceeded its Portable Appliance Test (PAT) retest date.

PAV Equipment not to be used if 6 month thorough examination (LOLER) has expired

The maximum pressure is factory set, and clearly marked on the compressor. Do not adjust, or tamper with the safety valves